

Camaro PUR

PRODUCT SPECIFICATION

Key Features

- > Wood, parquet & stone designs
- > Multiple plank & tile sizes
- > Inlay accessories available
- > Low VOC emissions
- > Light commercial & residential interiors



Product Format	Standard	Result
Gauge	ISO 24346 (EN 428)	2.0mm
Wear Layer	ISO 24340 (EN 429)	0.30mm
Total Weight	ISO 23997 (EN 430)	3600g/m ²
Finish		PUR

Plank & Tile Sizes	Size	Shades	Quantity per Box	Coverage per Box/Roll
Plank	Size Mix	1	36	3.62m ²
	76.2mm x 228.6mm	2	192	3.34m ²
	76.2mm x 457.2mm	3	96	3.34m ²
	101.6mm x 914.4mm	1	36	3.34m ²
	152.4mm x 914.4mm	1	24	3.34m ²
	152.4mm x 1219.2mm	1	18	3.34m ²
	184.2mm x 1219.2mm	13	15	3.37m ²
Tile	304.8mm x 304.8mm	1	36	3.34m ²
	304.8mm x 609.6mm	7	18	3.34m ²

Performance Requirements	Standard	Result
General Performance	ISO 10582 (EN 649)	Conforms
Use Area	ISO 10874 (EN 685)	23, 31
Slip Resistance	EN 13893 DIN 51130 / DIN EN 16165 Ann. B AS 4586 ASTM D2047	Class DS R10 R10 SCOF ≥ 0.5
Binder Content	ISO 10582	Type I
Abrasion Resistance	EN 649	Group T
Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 CAN/ULC S102.2	Class Bfl-S1 <450 Pass Class 1 FSV < 300; SDV < 500

Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ISO 24343-1 ASTM F970 ASTM F1914	<0.05mm* ≤0.005" @ 750psi ≤0.005"
Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
Dimensional Stability	ISO 23999 (EN 434) ASTM F2199	≤0.10% Pass
Underfloor Heating		Suitable, max 27°C
Light Fastness	ISO 105-B02 (Method 3)	≥6
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets

*Average test value from current production.

Sustainability

	Standard	Result
BRE Green Guide		A+ ENP 429
GreenTag	LCA Rate Gold Plus	GreenRate level A
Generic EN 15804 EPD		Available
Recyclable		100%
Recycled Content		Up to 40%
REACH		Compliant
Indoor Air Comfort Gold		Eurofins certified product
FloorScore		Certified
Finnish M1 Classification		Certified
AgBB/ABG		Pass
Responsible Sourcing	BES 6001 SA 8000	Very good Approved Factory

Acoustic Performance

	Standard	Result
Impact Sound Reduction	ISO 10140-3	2dB
Sound Transmission Coefficient	ASTM E90/492	STC 55
Impact Insulation Class	ASTM E90/492	IIC 39

Maintenance Performance

	Standard	Result
Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good resistance Good resistance

Regular light maintenance is more cost-effective than periodic heavy maintenance and more beneficial to the floor covering.



BS EN 14041



EN 14041

Polyflor Ltd. Head Office

PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR • Tel: +44 (0) 161 767 1111 • Email: info@polyflor.com • www.polyflor.com

© At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

Camaro PUR

RANGE SHADES



76.2mm x 228.6mm
3" x 9"



Cambridge Parquet **2251**
LRV 27



Georgian Parquet **2252**
LRV 16

76.2mm x 457.2mm
3" x 18"



Naked Blond Oak
Large Parquet **LPQ2252**
LRV 36



Westchester Oak
Large Parquet **LPQ2253**
LRV 39



Waterside Oak
Large Parquet **LPQ2256**
LRV 39

101.6mm x 914.4mm
4" x 36"



Nut Tree **2202** LRV 29

152.4mm x 914.4mm
6" x 36"



Smoke Brushed Elm **2233** LRV 25

Size Mix

Planks are supplied in 3 widths,
36 planks per box, (12 planks of each size).

76.2 / 101.6 / 152.4mm x 914.4mm
3/4/6" x 36"



Salvaged Timber **2247** LRV 23

152.4mm x 1219.2mm
6" x 48"



Natural Oak **2232** LRV 22

184.2mm x 1219.2mm
7.25" x 48"



Naked Blond Oak **PLK2257** LRV 36



Westchester Oak **PLK2253** LRV 39



Waterside Oak **PLK2256** LRV 39



Bianco Oak **2241** LRV 46

184.2mm x 1219.2mm (continued)
7.25" x 48"



Rosedale Oak **2254** LRV 42



Boathouse Oak **2242**  LRV 27



Fenland Oak **2258** LRV 30



Quayside Oak **2246** LRV 30



Cashmere Oak **2244** LRV 32



Sienna Oak **2248** LRV 29



Astoria Oak **2259**  LRV 20




Wild Amber Oak **2249**  LRV 19



Bayswater Oak **2261** LRV 25


Camaro PUR

304.8mm x 304.8mm
12" x 12"



Atlantic Slate **2339**
LRV 8

304.8mm x 609.6mm
12" x 24"

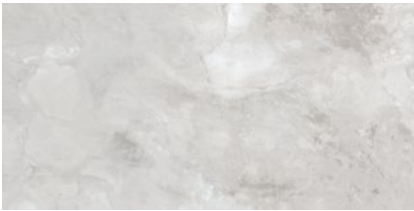


Arctic Slate **2341** LRV 53



White Metalstone **2332** LRV 57




Soho Cement **2347** LRV 50

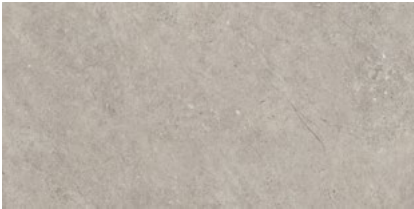

Burnished Concrete **2342** LRV 37



Tribeca Cement **2348** LRV 39

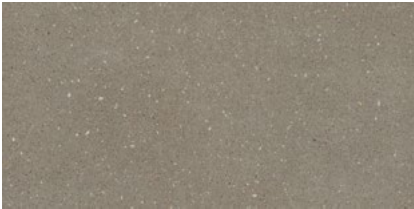

Goldstone Micro Terrazzo **2349** LRV 29



Ocean Slate **2319** LRV 23

LRV - Light Reflectance Value

 Micro Bevelled Edges

 Colour/Pattern Variation

Polyflor Ltd. Head Office

PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR • Tel: +44 (0) 161 767 1111 • Email: info@polyflor.com • www.polyflor.com

© At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.