


EJC65 POLYSPAN JOINT COVER

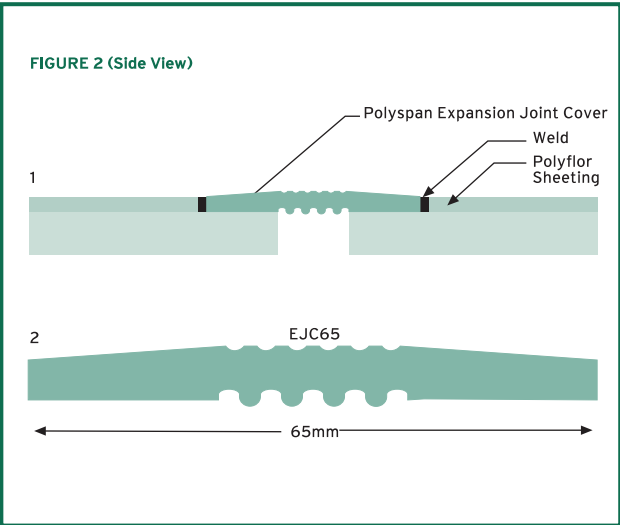

65 mm x 2 mm PVC Strip with a 20 mm expandable strip in the centre for application over filled expansion joint with a weld capability to the sheeting on either side of the expansion joint. Please see Figure 2.

Fitting the Polyspan EJC65 expansion joint:

Some of the procedures suited for fitting the above product are as follows:

1. Fill the expansion joint slot with an approved polysulphide or similar suitable sealer as may be required to seal the joint where applicable while still allowing movement between the surfaces.
2. Then push into the gap from the top an appropriate fibreboard (hardboard) or cork in a suitable thickness on edge to fit tightly in the joint, giving the capability to support the Polyspan EJC cover. (The general opinion is, however, that the fibreboard or cork procedure is in fact a well tried system, and gives some room for compression and movement also being supported from below by the sealant.)

