


Polysafe Vogue Ultra PUR



PRODUCT SPECIFICATION

Key Features

- > Heavy-duty safety flooring
- > Traditional multi-chip decoration
- > Pendulum test - 36+ (slider 96)
- > Sustainable slip resistance
- > Polysafe PUR for superior cleaning benefits

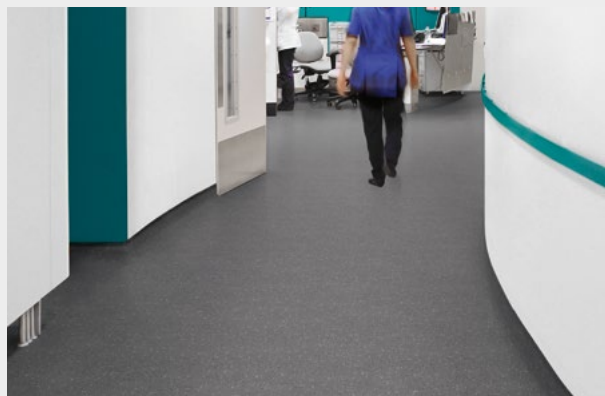

Product Format	Standard	Result
Gauge	ISO 24346 (EN 428)	2.0mm
Total Weight	ISO 23997 (EN 430)	2400g/m ²
Finish		PUR

Sheet Size	Size	Shades	Quantity per Box	Coverage per Box/Roll
Sheet	2m x 20m	18	-	40m ²

Performance Requirements	Standard	Result
General Performance	EN 13845 ASTM F1303	Conforms Type II, Grade I, Class B Backing
Use Area	ISO 10874 (EN 685)	23, 34, 43
Enhanced Slip Resistance	EN 13845 AS 4586 RRL Pendulum Test DIN 51130 / DIN EN 16165 Ann. B Surface Roughness ASTM D2047	ESf R10 ≥36 (wet test - 4S Rubber / Slider 96) R10 Rz ≥20µm SCOF ≥0.8
Abrasion Resistance	EN 13845	50,000 cycles
Reaction to Fire	EN 13501-1 ASTM E648 CAN/ULC S-102.2 AS ISO 9239-1	Class Bfl-S1 Class 1 FSV < 300; SDV < 500 >8.0kW/m ²
Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
Residual Indentation	ASTM F970 (Modified)	≤0.005" (750psi)
Flexibility	ASTM F137	1.5" Pass
Resistance to Light	ASTM F1515	ΔE ≤ 8.0 - Meets
Resistance to Heat	ASTM F1514	ΔE ≤ 8.0 - Meets

Sustainability	Standard	Result
BRE Green Guide		A+ ENP 472

Generic EN 15804 EPD		Available
Recyclable		100%
Recycled Content		Contains recycled material
REACH		Compliant
Indoor Air Comfort Gold		Eurofins certified product
FloorScore		Certified
Finnish M1 Classification		Certified
AgBB/ABG		Pass
Responsible Sourcing	BES 6001	Excellent

Maintenance Performance	Standard	Result
Resistance to Chemicals	ISO 26987 (EN 423)	Good resistance
	ASTM F925	Good resistance
Alco Hand Gels	Compatible for use with most commonly used alco-based hand gels	
Steam Cleaning	Suitable for steam cleaning on a periodic basis	

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

Hygiene	Standard	Result
Bacterial Resistance	ISO 846 Part C	Does not favour growth



BS EN 14041



EN 14041

Polyflor Ltd. Head Office

PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR • Tel: +44 (0) 161 767 1111 • Email: info@polyflor.com • www.polyflor.com


© At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

V1


Polysafe Vogue Ultra PUR




RANGE SHADES




Snowstorm 4835 w/r 4930
NCS S 2500-N LRV 49




Bisque 4860 w/r 4860
NCS S 2002-Y50R LRV 48




Barley 5500 w/r 5500
NCS S 3005-Y20R LRV 42




Toffee 4825 w/r 4825
NCS S 4010-Y30R LRV 30




Whirlpool 4805 w/r 5570
NCS S 3500-N LRV 37




Woodland Grey 4770 w/r 9120
NCS S 4500-N LRV 30




Oystershell 4800 w/r 2010
NCS S 3010-Y60R LRV 41




Marine 4870 w/r 4700
NCS S 4030-B LRV 22




Bluebell 5510 w/r 5510
NCS S 4020-R80B LRV 23




Seawater 5490 w/r 5490
NCS S 5030-R90B LRV 15




Steel Blue 4740 w/r 4910
NCS S 5020-R80B LRV 14




Winter Dusk 4730 w/r 9120
NCS S 5500-N LRV 23




Blackbird 5560 w/r 5560
NCS S 7500-N LRV 11




Nightsky 4760 w/r 4760
NCS S 6500-N LRV 17




Grasshopper 5540 w/r 5540
NCS S 3010-G30Y LRV 37



Forest Pine 4500 w/r 4350
NCS S 5005-G50Y LRV 24



Firestar 4790 w/r 4640
NCS S 5030-Y80R LRV 16



Galactic 4815 w/r 8640
NCS S 8502-B LRV 6

w/r - Weld Rod

LRV - Light Reflectance Value

NCS - Natural Colour System

Polyflor Ltd. Head Office

PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR • Tel: +44 (0) 161 767 1111 • Email: info@polyflor.com • www.polyflor.com

© At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

V1